

Insulation plugs with nylon nail

TTH



Plug for general purpose use in hard and soft insulation pads. Special plug used for fixation of insulation material. Plug is easily installed only by hammering in. High resistant in meteorological conditions.


Application:

- concrete
- brick
- stone
- hollow brick

Advantages:

- easy installation
- fast installation
- low price
- no thermal bridge

Installation

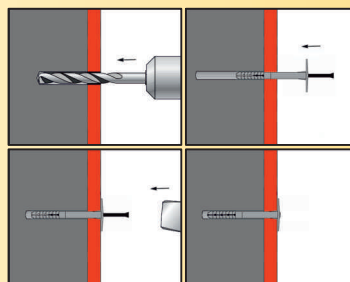

Material: Plug – Copolymer, Nail – Polyamide (Nylon) with glass

Type TTH – Technical data and price

Size	Drill \varnothing	Minimum drill depth	Fixing depth	Anchor length	Disc \varnothing	Insulation thickness	Recommended loads		Basic price per 100 pcs
							concrete	brick	
10/60 - 90	10	45	40	90	60	40	0,187	0,150	5,58 €
10/60 - 110	10	45	40	110	60	60	0,187	0,150	6,29 €
10/60 - 120	10	45	40	120	60	70	0,187	0,150	6,47 €
10/60 - 130	10	45	40	130	60	80	0,187	0,150	6,65 €
10/60 - 140	10	45	40	140	60	90	0,187	0,150	7,01 €
10/60 - 150	10	45	40	150	60	100	0,187	0,150	7,37 €
10/60 - 160	10	45	40	160	60	110	0,187	0,150	7,91 €
10/60 - 170	10	45	40	170	60	120	0,187	0,150	8,63 €
10/60 - 180	10	45	40	180	60	130	0,187	0,150	9,35 €
10/60 - 190	10	45	40	190	60	140	0,187	0,150	10,07 €
10/60 - 210	10	45	40	210	60	160	0,187	0,150	11,51 €

All figures are in mm

Recommended loads in kN
(1 kN \cong 100 Kg)